



CSA Z96-09 Configuration Reference Sheet

Class 1




2" striping: *Only FR Class 1 Level 2 can have silver < 2" wide

Special consideration - gaps in retroreflective silver $\leq 2''$

*4" striping: Required for Non-FR, and FR Level FR & FR Level 1

Class 2

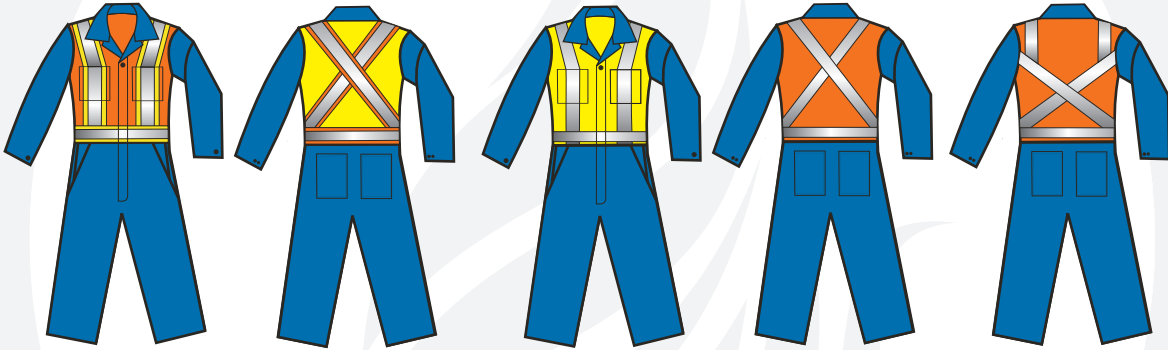

*Required: minimum 2" wide retroreflective silver striping & CSA Z96 fluorescent or fluorescent/bright colours

Special consideration - gaps in retroreflective silver $\leq 2''$

Class 3



*Required: minimum 2" wide retroreflective silver striping & CSA Z96 fluorescent or fluorescent/bright colours

