



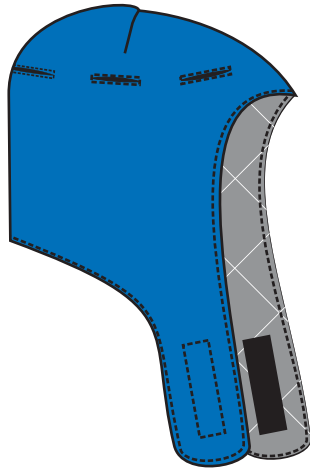

# 20H4US/ 20H4NX

## FR/AR HARD HAT LINER- "4-HOLE" SUSPENSION

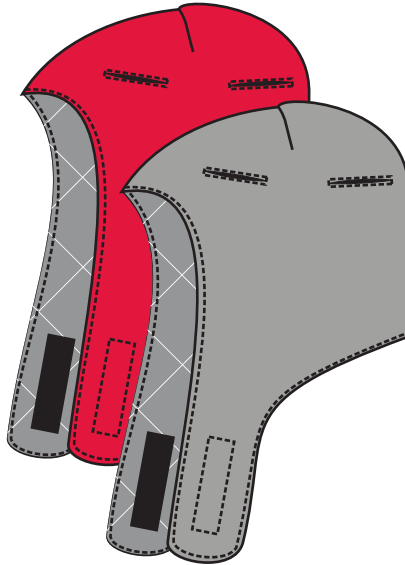

### COMPONENTS

#### Outer Shell

- 9 oz UltraSoft® twill weave– the High Performance & comfortable FR cotton
- OR**
- 6 oz Nomex Essential® plain weave

#### Wind/Vapour Barrier

- 3.25 oz separate, one way breathable for wind & moisture resistance

#### Insulation

- Quilted flame resistant 14 oz modacrylic

#### HIGH VISIBILITY STRIPING

- Not applicable

#### GARMENT CONSTRUCTION

- Nomex® high tenacity flame resistant thread
- Bar-tacked at all stress points
- Adjustable chin strap with hook & loop closure
- Reinforced "cut through" points
- Nomex® outershell available in "6-hole" configuration

#### GARMENT: PPE STANDARDS MET- UltraSoft®

- CAN/CGSB-155.20-2017 (Flash Fire Workwear)
- ASTM F 1506 (Arc Rated Clothing)
- 12.4 cal/cm2 ATPV Arc Rating
- PPE Cat 2: CSA Z462 & NFPA 70E (Workplace Electrical Safety)

#### GARMENT: PPE STANDARDS MET- Nomex®

- CAN/CGSB-155.20-2017 (Flash Fire Workwear)
- ASTM F 1506 (Arc Rated Clothing)
- 5.7 cal/cm2 ATPV Arc Rating
- PPE Cat 1: CSA Z462 & NFPA 70E (Workplace Electrical Safety)

#### SIZING

- One size

\*\*"6-hole" configuration -20H6-  
 available in Nomex® outer shell only

#### COLORS

- Ultrasoft® available in Royal, Grey, Navy, Red. Nomex® available in Royal
- Other colors available on request

#### CARE

- Home wash, industrial laundry or dry clean



*Transforming Safety Apparel*

